





S-SMART CS 24-42

Automatic Column Type Straight Cutting Bandsaw

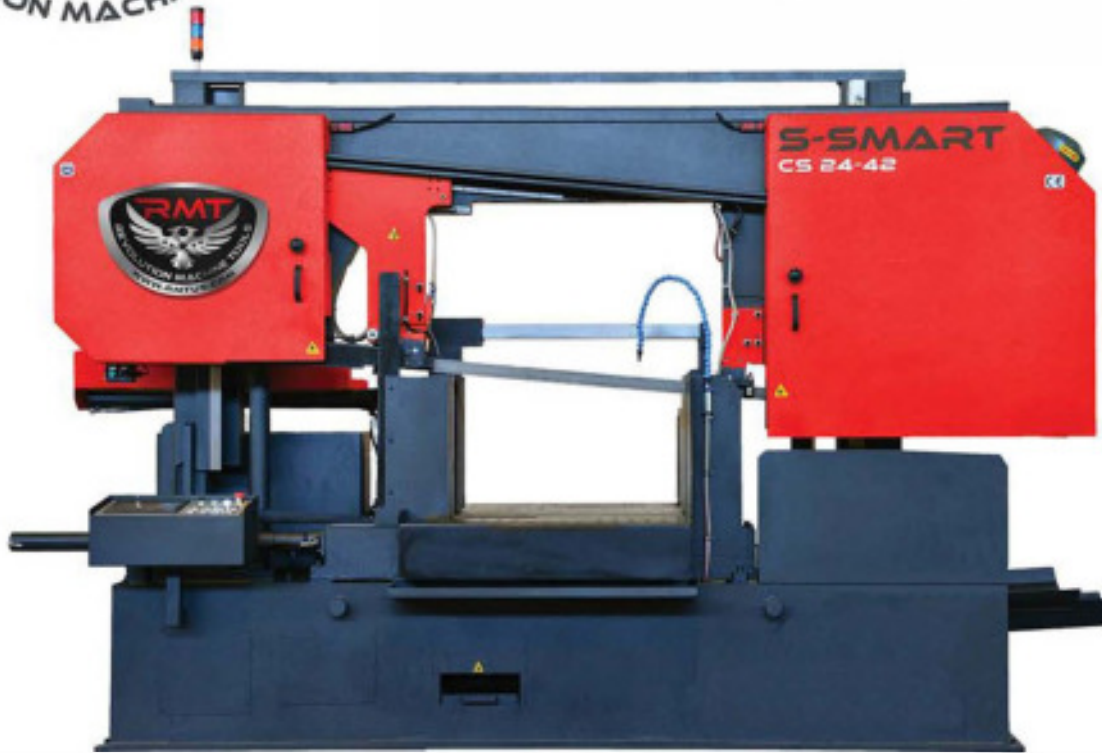

STANDARD

- Touch screen NC control panel
- Blade brush
- Double action hydraulic fixed vise
- Double action hydraulic feeding vise with servo motor traveling
- Split vise up to 27.6" per stroke
- Security switch
- Planetary Gearbox
- Infinite variable speed inverter
- Sensitive pressure control
- Hydromechanical blade tension
- Linear guide rails
- Optical saw adjustment
- Coolant pump

OPTIONAL

- Hydraulic blade tension
- Hydraulic blade clamping
- Dropsa air/oil clean lubrication
- Hexagonal vise for bundle cutting
- Microspray device
- 10 ft roller table
- 10 ft motorized roller table
- Custom options - What do you need?

S-SMART CS 24-42		Metric	US
Capacity at 0°	Round	650 mm	26" in
	Flat (H x W)	1050 x 600	42" x 24" in
	Square	600 mm	24" x 24" in
Cutting Speeds		20-100 m/min	60'-328' ft/min
Band Dims.		8400 x 54 x 1.6 mm	322.8" x 2"
Main Motor		11.5 kW	15 HP
Hydraulic Motor		4 kW	5.4 HP
Feed Motor		2 kW	2.7 HP
Coolant Motor		.12 kW	.16 HP
Chip Conveyor Motor		.25 kW	.4 HP
Working Height		825 mm	24.8" in
Weight		6580 kg	16390 lbs
Machine Dims.	Length	4250 mm	167" in
	Width	1950 mm	77" in
	Height	2600 mm	103" in

www.RMTUS.com