





S-FAB CDM 14-25

Semiautomatic Column Type Double Miter Bandsaw

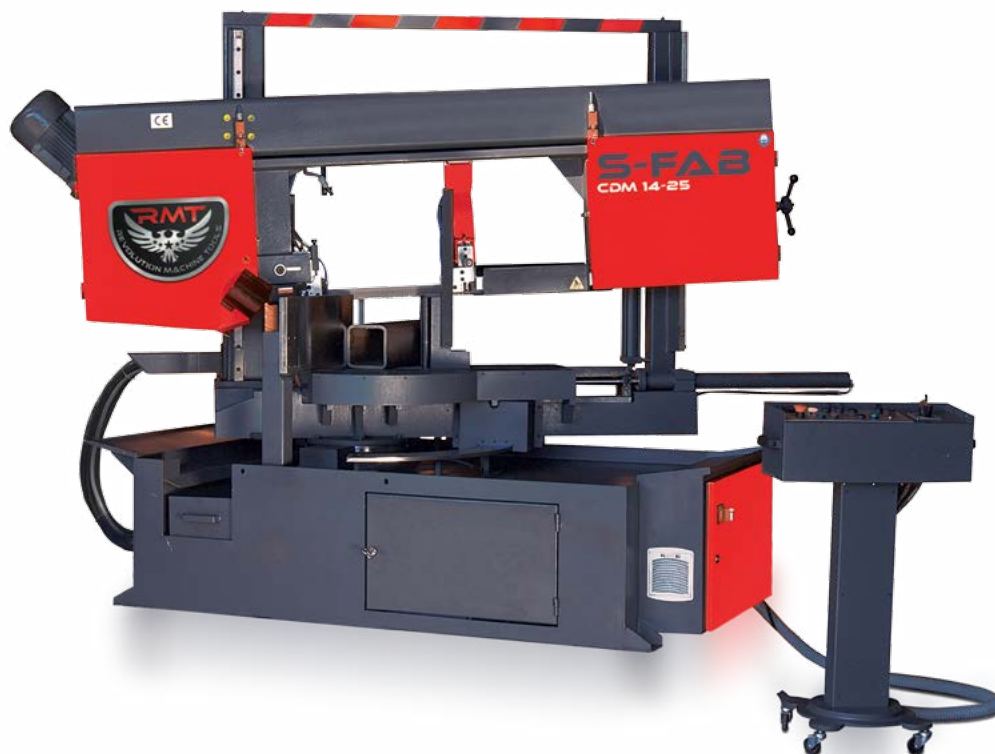

STANDARD

- Control Panel
- Blade Brush
- Hydraulic Vice
- Security Switch
- Siti Heavy Duty Gearbox
- Inverter
- Sensitive Pressure Control
- Hydromechanical Blade Tension
- Optical Saw Height Adjustment
- Linear Guide Rails
- Coolant Pump
- 4ft Roller Table

OPTIONAL

- Hydraulic Blade Tension
- Hydraulic Top Clamping
- Microspray Cooling
- 10ft Roller Table
- 10ft Motorized Roller Table
- Laser Line

S-FAB CDM 14-25		Metric	US
Capacity at 0°	Round	360 mm	14.2" in
	Flat (H x W)	360 x 640 mm	14.2" x 25.1" in
	Square	360 mm	14.2" in
Capacity at 30°	Round	360 mm	14.2" in
	Flat (H x W)	360 x 510 mm	14.2" x 20" in
	Square	360 mm	14.2" in
Capacity at 45°	Round	360 mm	14.2" in
	Flat (H x W)	360 x 390 mm	14.2" x 15.3" in
	Square	360 mm	14.2" in
Capacity at 60°	Round	310 mm	12.2" in
	Flat (H x W)	360 x 250 mm	14.2" x 9.8" in
	Square	270 mm	10.6" in
Capacity at 30°	Round	360 mm	14.2" in
	Flat (H x W)	360 x 510 mm	14.2" x 20" in
	Square	360 mm	14.2" in
Capacity at 45°	Round	360 mm	14.2" in
	Flat (H x W)	360 x 390 mm	14.2" x 15.3" in
	Square	360 mm	14.2" in
Cutting Speeds		20- 100 m/min	65- 328 ft/min
Band Dims.		5000 x 34 x 1.1 mm	16'5" x 1.25" x 0.043" in
Main Motor		4 kW	5.5 HP
Hydraulic Motor		1.1 kW	1.5 HP
Weight		1635 kg	3605 lbs
Machine Dims.	Length	3000 mm	119" in
	Width	1200 mm	48" in
	Height	1910 mm	76" in